


1



Insert band through buckle, teeth toward the user, ears up. For better result, continue band around object once again through buckle. Bend end of band under buckle.

2

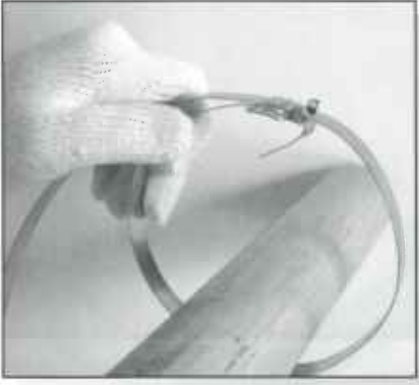

Push axle handle so the band can be placed in slots of tool. Push nose of tool against the buckle.

3




Place finger on buckle bridge and apply tension by turning handle.

4




When desired tension is reached, swing tool over buckle. This movement increase tension of band and, to avoid breakage, handle must be reversed slightly as tool is swing over.

5

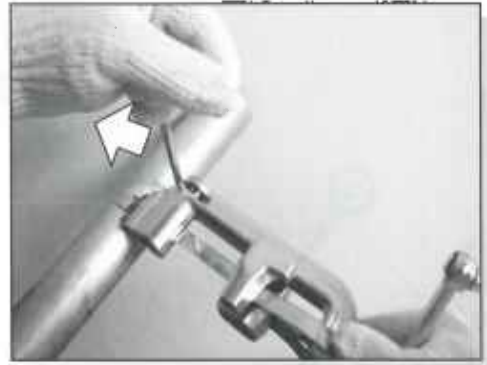


Pull cutter handle to cut band.

6

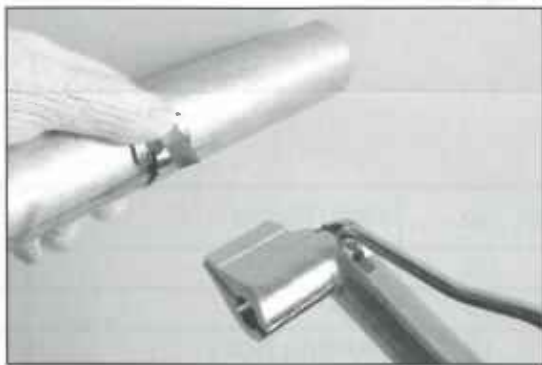

Remove tool, whilest holding band down with thumb.

7

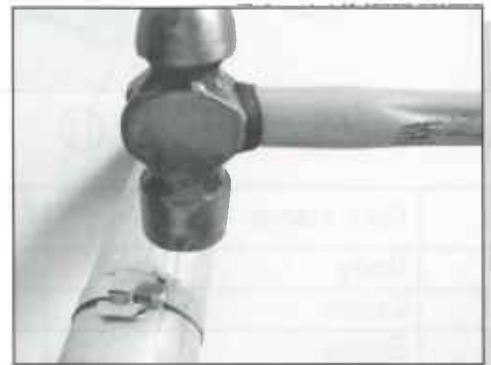

Hammer ears down to seal the band.